

DESCRIPTION

3.9" small aperture fixed position round recessed showerlight trim. For use with 12V MR16 lamp 50W max. Use with Mini Accurus housings (ACM500, ACM502IC, ACM504RM).

For use in downlighting applications where small aperture recessed ceiling fixtures are desired to illuminate shower locations.

Catalog #		Type
Project		
Comments		Date
Prepared by		

SPECIFICATION FEATURES

A...Recessed Trim

Fixed position showerlight. 3.9" o.d. trim face with 1.7" aperture. Includes bullet plunger retainers for smooth snap-in action during installation and removal of trim for relamping. Helps guard against plaster cracking.

B...Lamp

For use with 12V MR16 lamp 50W max. Lamp not included.

C...Socket

Posi-Grip bi-pin socket for firm, mechanical lamp connection. (Included with Mini Accurus Housing sold separately)

D...Lens

Solite™ soft focus lens with silicone gasket included. Can hold up to one (1) optical accessory total.

E...Finish

Trim face is powder coated in white, black, industrial silver, stainless steel or primer finish for painting in existing ceiling color. All other internal components are flat black.


F...Safety

Steel safety cable provided. Attaches to tab inside housing to prevent falling during maintenance or as a result of accidental dislodging of the trim.

G...Gasketed

Trim is assembled with 1/16" closed cell silicone foam gasket for shower location installations.

NOTE: Not intended for saunas or steam rooms.

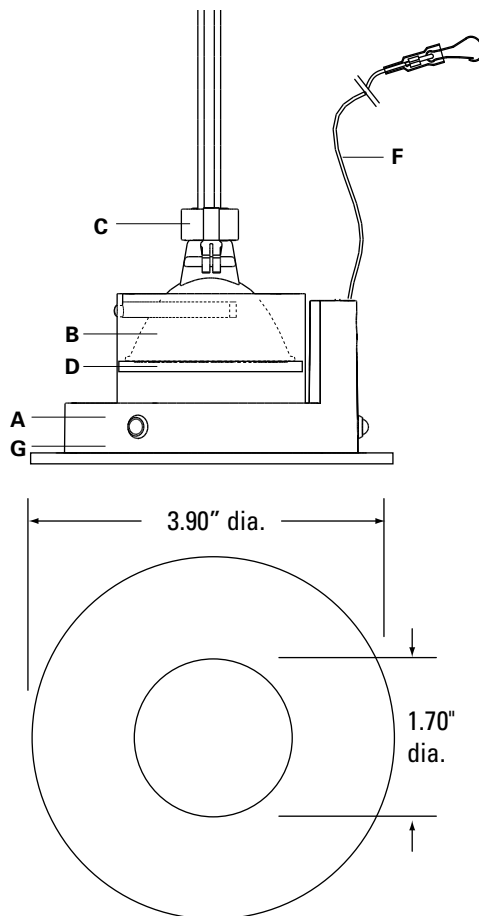

MINI ACCURUS RECESSED TRIM

ACM5004
3.9" O.D.
1.7" Aperture
Round Fixed
Wet Location
Showerlight

FOR 12V MR16 50W max.

Compatible Housings:

ACM500

ACM502IC

ACM504RM



ORDERING INFORMATION

ACM5004	
Fixture ACM5004= 3.9" Recessed Fixed Position Round Showerlight Trim 1.7" Aperture	Finish WH = White BK = Black S = Industrial Silver SS = Stainless Steel (painted) PM = Primer